

# ENGINE ORDER TELEGRAPHS SYSTEM


## ENGINE ORDER TELEGRAPHS

TYPE: SCM-2L

**MODEL: TLB-32-2L**

**(Standard telegraph)**

**SCM**  
SISTEMAS

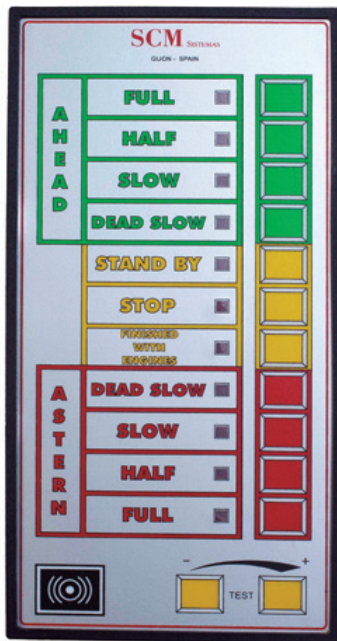

### FEATURES

- Order selection using push-buttons.
- Order indication using LEDs.
- Material: ABS plastic.
- Includes alarm devices for both supply and main failures.
- Allows external acoustic/luminous alarms activation (for noisy areas: engine room, etc.)
- Includes buzzer for low-noisy areas: wheelhouse, cabin, etc.
- Admits interface to communicate with the VDR.

### TECHNICAL SPECIFICATIONS

Power supply	24 VDC
Power consumption	10 W
Acoustic alarm	104 dB(A) (1m)
Operating temperature	-20°C to +50°C
Relative humidity	Up to 95% (non condensing)
Assembly	Console
Weight	Approx 1.5 kg
IP-rating	54

# ENGINE ORDER TELEGRAPHS SYSTEM

ENGINE ORDER TELEGRAPHS

TYPE: SCM-2L

**MODEL: TLB-32-2L**  
**(Standard telegraph)**

**SCM**  
SISTEMAS

